falmec

**VERSO COMFORT** **EAN code 8034122371481**

| | |
|---|---|
| ***Version*** | Wall - 85 cm - Black matt - 800 m3/h |
| ***Design*** | Falmec Lab |
| ***Collection*** | Design |



Photograph is for information purposes only. May not correspond to the selected version

### *TECHNICAL FEATURES*

| | |
|---|---|
| ***Materials/Finishes*** | Black matt glass |
| ***Technology*** | Comfort-Silence technology for noise reduction |
| ***Features*** | Double suction area (frontal and lower)<br>Opening frontal |
| ***Control*** | Touch control<br>Remote control (optional)<br>Dialogue system |
| ***Function*** | Extracting/Filtering |
| ***Chimney*** | Optional chimney |
| ***Lighting*** | Dynamic Light (2700K - 5600K)<br>Dimmable lighting<br>Strip LED 2x1,7 W - 2700 K / 5600 K |
| ***Filters*** | Metallic grease filter, removable and washable<br>Combined Carbon.Zeo Microtech regenerable filter (optional) |
| ***Dimensions*** | 85 cm |
| ***Minimum Electric hob distance*** | 52 cm |
| ***Minimum Gas hob distance*** | 52 cm |
| ***Notes*** | Available from October 2026 |

### *CONNECTION AND CONSUMPTION FUNCTIONS*

| | |
|---|---|
| ***Maximum consumption*** | 280 W |
| ***Voltage/Frequency*** | 220-240V 50-60Hz |

### *MOTOR*


| | |
|---|---|
| ***Motor*** | 800 $m^3$/h |
| ***Maximum capacity*** | 521 $m^3$/h I.E.C.61591 |
| ***Maximum sound level*** | 61 dB (A)re1pW I.E.C. 60704-2-13 |
| ***Energy class*** | A |


### *WEIGHTS AND VOLUMES*

| | |
|---|---|
| ***Gross weight*** | 23.2 kg |
| ***Net weight*** | 17.9 kg |
| ***Volume*** | 0.27 m3 |
| ***Packaging dimensions*** | L 995 x H 452 x P 595 mm |


falmec

**VERSO COMFORT** **EAN code 8034122371481**




Side view





Optional chimney

***Optional accessories***

| *Code* | *Description* |
|---|---|
| KACL.1059 | Conveyer for air outlet (Ø150) |
| 105080053 | Remote control |
| KACL.1074 | Carbon.Zeo Microtech filter (Verso Comfort) |
| FDS 100 Schabus | |
| KCAIN.00#N | Chimney - Black |

falmec

**VERSO COMFORT** **EAN code 8034122371481**

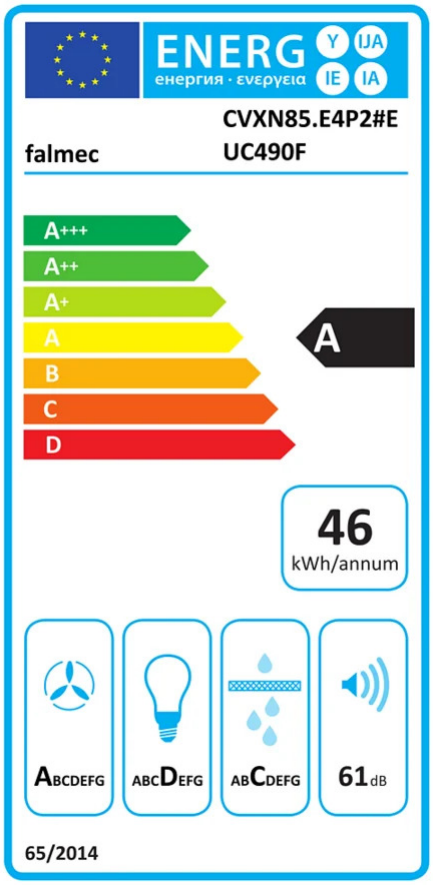


| PF | | |
|---|---|---|
| S | Falmec Lab | |
| M | Wall - 85 cm - Black matt - 800 m3/h | |
| AEC | 45.90 | kWh/a |
| EEC | A | |
| FDE | 29.30 | |
| FDEC | A | |
| LE | 12.70 | |
| LEC | D | |
| GFE | 82 | |
| GFEC | C | |
| Qmin | 291 | $m^3$ /h |
| Qmax | 521 | $m^3$ /h |
| Qboost | 644 | $m^3$ /h |
| SPEmin | 47 | dBa |
| SPEmax | 61 | dBa |
| SPEboost | 65 | dBa |
| PO | | |
| PS | 0.28 | W |
| **PI** | | |
| F | 0.90 | |
| EEI | 51.10 | |
| Qbep | 289 | $m^3$ /h |
| Pbep | 607 | Pa |
| Qboost | 644 | $m^3$ /h |
| Wbep | 132 | W |
| WL | 3.50 | W |
| Emiddle | 44 | lux |
| Lwa-SPEmax | 61 | dBa |

**PF_Scheda prodotto conforme a 65/2014** S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in $m^3$/h) at min speed in normal use / Qmax_Air flow (in $m^3$/h) at max speed in normal use / Qboost_Air flow (in $m^3$/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).
**PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.

rev. 04/11/2026